

# ESD Solutions for SPI Ports

# RClamp<sup>®</sup>0582BQ key features

- 5V working voltage
- Protects two high-speed data lines
- ±25kV contact/±30kV air
- Dynamic resistance:  $0.52\Omega$
- Low capacitance: 1.2pF (typ)
- Industry standard SC-75 package

### Alternative Solutions


## RClamp<sup>®</sup>0502A **KEY FEATURES**

- 5V working voltage
- Protects two high-speed data lines
- $\pm 15$ kV contact/ $\pm 20$ kV air
- Low capacitance: 0.7pF I/O to I/O
- Flow-through package (1.6 x 1.6 x 0.6mm)

# RClamp<sup>®</sup>0531TQ key features

- 5V working voltage
- Protects one high-speed data line
- ±12kV contact/±20kV air
- Low capacitance: 0.8pF I/O to GND
- Flow-through package (1.0 x 0.6 x 0.4mm)


# 🚺 🕕 🎯 🕖 💓 🛄 📖 🕺

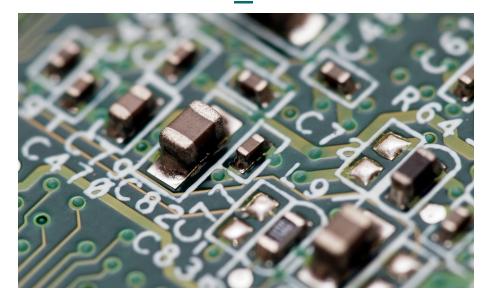

# ESD Protection to Safeguard SPI Ports

The Serial Peripheral Interface (SPI) is a serial communication interface used for short distance communication in embedded systems. SPI uses a full-duplex mode communication standard and employs a master/slave architecture.

The SPI bus is often vulnerable to damage from ESD transient voltage spikes. To adequately protect SPI ports from ESD damage, circuit designers use transient voltage suppressors to safeguard from these transient threats. Semtech's 5V transient voltage protection diodes (TVS) are ideally suited for safeguarding SPI ports that reside in harsh electrical environments. The schematic below shows a typical example of protecting a SPI port from ESD damage.

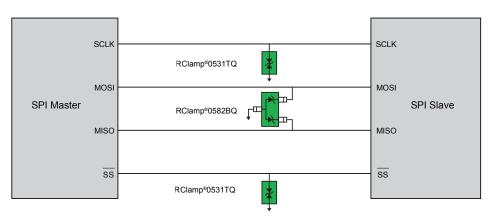

SPI Port Protection with Semtech RClamp®0582BQ TVS Array Solution

Clamp®0582BQ - Absolute Maximur	n Rating									
Maximum Rating	Symbol	Value			Unit					
Peak Pulse Power (tp = $8/20\mu s$ )	P <sub>pk</sub>		30	00	W					
Peak Pulse Current (tp = 8/20µs)	I <sub>pp</sub>		1	5	А					
ESD per IEC 61000-4-2 (Air) <sup>(1)</sup> ESD per IEC 61000-4-2 (Contact) <sup>(1)</sup>	V <sub>ESD</sub>	±30 ±25		kV						
Operating Temperature	Tj		-40 to	+105	°C					
Storage Temperature	T <sub>STG</sub>		-55 to	+150		°C				
ectrical Characteristics (T = 25°C)										
Parameter	Symbol	Condition		Min	Тур	Max	Units			
Reverse Stand-Off Voltage	V <sub>RWM</sub>	Pin 1 or Pin 2 to Pin 3				5	V			
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>BR</sub> = 1mA, Pin 1 to Pin 2 to Pin 3		6		11	V			
Reverse Leakage Current	I			, Pin 1 or Pin 2 to Pin 3 etween Pin 1 and 2			0.1	μA		
Reverse Leakage Current	I <sub>R</sub>	$V_{RWM} = 5V$		, Pin 1 or Pin 2 to Pin 3 etween Pin 1 and 2			0.23	μA		
Clamping Voltage	Vc	t <sub>p</sub> = 8/	′20µs	$I_{pp} = 5A$			15	V		
	v.	Pin 1 or Pin 2	Pin 1 or Pin	Pin 1 or Pin 2	2 to Pin 3	I <sub>PP</sub> = 15A			20	
ESD Clamping Voltage <sup>(2)</sup>	Vc	$t_{p} = 0.2/100 \text{ns}$ Pin 1 or Pin 2 to Pin 3 $I_{PP} = 4A$ $I_{PP} = 16A$		$I_{PP} = 4A$		13.8				
				I <sub>pp</sub> = 16A		20.1				
Dynamic Resistance <sup>(2) (3)</sup>	$R_{DYN}$	$t_{\rm p}$ = 0.2/100ns, Pin 1 or Pin 2 to Pin 3			0.52		ohm			
lunction Conscitance	6	Any I/O to Gnd $V_R$ = 0, f = 1MHz, Pin 1 to pin 2			0.5	0.8	pF			
Junction Capacitance	Cj	C <sub>j</sub> I/O to I/O V <sub>R</sub> = 0, f = 1MHz, Pin 1 or Pin 2 t					1.2	pF		

#### Notes

1) Measured with a 40dB attenuator, 500hm scope input impedance, 2GHz bandwidth. ESD gun return path connected to ESD ground plane.

2) Transmission Line Pulse Test (TLP) Settings:  $t_p = 100$  ns,  $t_r = 0.2$  ns,  $I_{TLP}$  and  $V_{TLP}$  averaging window:  $t_1 = 70$  ns to  $t_2 = 90$  ns. 3) Dynamic resistance calculated from  $I_{TLP} = 4A$  to  $I_{TLP} = 16A$ .

#### **ORDERING INFORMATION**

Part Number	Qty Per Reel	Reel Size
RClamp0582BQTCT	3,000	7 inches

RClamp®0502A - Absolute Maximum Rating						
Maximum Rating	Symbol	Value	Unit			
Peak Pulse Power ( $t_p = 8/20\mu s$ )	P <sub>pk</sub>	50	W			
Peak Pulse Current ( $t_p = 8/20\mu s$ )	I <sub>pp</sub>	3	А			
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V <sub>ESD</sub>	±20 ±15	kV			
Operating Temperature	Tj	-55 to +125	°C			
Storage Temperature	Tstg	-55 to +150	°C			

### Electrical Characteristics (T = 25°C)

Parameter	Symbol	Condition	Min	Тур	Max	Units
Reverse Stand-Off Voltage	V <sub>RWM</sub>	Between I/O lines to Gnd or I/O to I/O			5	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>t</sub> = 1mA, Between I/O lines to Gnd	6			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> = 5V, T = 25°C Between I/O lines to Gnd or I/O to I/O			1	μA
Clamping Voltage	Vc	$I_{pp} = 1A$ , tp = 8/20µs Between I/O lines to Gnd			14	V
		$I_{pp} = 3A$ , tp = 8/20µs Between I/O to Gnd			16	V
		$I_{pp} = 3A$ , tp = 8/20µs Between I/O to I/O			16	V
Junction Capacitance	Cj	$V_{R} = 0V, f = 1MHz$ Between I/O to Gnd			0.9	pF
		$V_{R} = 0V$ , f = 1MHz Between I/O to I/O		0.3	0.7	pF

### **ORDERING INFORMATION**

Part Number	Qty Per Reel	Reel Size	Lead Finish
RClamp0502A.TCT	3,000	7 inches	Pb Free

Maximum Rating	Symbol	Value	Unit			
Peak Pulse Power ( $t_p = 8/20 \mu s$ )	P <sub>pk</sub>	80	W		V	
Peak Pulse Current (t <sub>p</sub> = 8/20µs)	I <sub>pp</sub>	4	А			
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V <sub>ESD</sub>	±20 ±12	kV			
Operating Temperature	Tj	-55 to +125	°C			
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C			
ectrical Characteristics (T = 25°C)						
Parameter	Symbol	Condition	Min	Тур	Max	Uni
Reverse Stand-Off Voltage	V <sub>RWM</sub>				5	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>t</sub> = 1mA	6	9.3	11	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> = 5V, T = 25°C		0.010	0.100	μA
		V <sub>RWM</sub> = 5V, T = 125°C		0.020	0.200	μA
Clamping Voltage	N	$I_{pp} = 1A$ , tp = 8/20µs			12	V
	Vc	$I_{pp} = 4A$ , tp = 8/20µs			20	V
Junction Capacitance	C	$V_{R} = 0V, f = 1MHz, T = 25^{\circ}C$		0.5	0.8	pł
	Cj	V₂ = 0V, f = 1MHz, T = 125°C		0.85	1.5	pF

### **ORDERING INFORMATION**

Part Number	Qty Per Reel	Reel Size	Lead Finish
RClamp0531TQTCT	3,000	7 inches	Lead-free NiPdAu



200 Flynn Road, Camarillo, California 93012 • phone: (805) 498-2111 • fax: (805) 498-3804

Semtech, the Semtech logo and RClamp are registered marks of Semtech Corporation. All other trademarks and trade names mentioned may be marks and names of their respective companies. Semtech reserves the right to make changes to, or discontinue any products described in this document without further notice. Semtech makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. ©2017 Semtech Corporation. All rights reserved. SPI-ports-PB